ECE2013 / Fall 2026

Planning and Games

Constraint Satisfaction and Adversarial Search

Assignment 2 / Group 6

Course Advanced AI Algorithms and Systems

Members Wang Libin Jiang Jiahao

Wang Zizheng Xue Xiaokang

Section I Constraint Satisfaction

Exact-cover formulation

The tiling problem is represented as exact cover. Each available board cell and each tile identity contributes one constraint. A legal placement covers the cells it occupies and the identity of its tile. Selecting placements that satisfy every constraint exactly once therefore covers the board without overlap or omission and uses each tile once.

Let C be the available cells and I the tile identities, giving the disjoint constraint set $U = C \sqcup I$. A legal placement p covers a subset $R_p \subseteq U$, and the binary variable x_p indicates whether it is selected. The tiling conditions become

$$\sum_{p:\, u \in R_p} x_p = 1 \quad (\forall u \in U), \qquad x_p \in \{0, 1\}. \tag{1}$$

Cell constraints enforce coverage without overlap; identity constraints enforce single use. Identical shapes still need separate identities. For example, sixty cells and twelve pentominoes give seventy-two constraints; each placement covers six: five cells and one identity.

Algorithm X and minimum remaining values

Exact cover can be solved by Algorithm X, a depth-first backtracking procedure.[1]

We first generate distinct rotations and reflections and enumerate placements that remain inside the board and avoid holes. Search uses the minimum remaining values heuristic: choose the uncovered constraint with the fewest available placements. After selecting a placement, remove all conflicting candidates; backtrack as soon as any constraint has no candidate. Integer bitsets reduce the cost of these set operations. Every candidate for the chosen constraint is considered, so the search is complete, although its worst-case complexity remains exponential.

If A denotes the available placements and U' the uncovered constraints, the minimum remaining values rule selects

$$c^* = \arg\min_{c \in U'} \big|\{p \in A : c \in R_p\}\big|. \tag{2}$$

After choosing a placement p covering c^*, remove the constraints in R_p and all other placements that intersect R_p. Zero candidates means failure; no uncovered constraints means success. Choosing the tightest constraint exposes failure early and allows search to switch adaptively between placing a tile and covering a cell.

Selected placements remain pairwise compatible, while uncovered constraints must remain coverable by subsequent candidates. Removing conflicts performs forward checking; backtracking restores the previous candidate state. The heuristic changes exploration order, not the solution set. Bitsets reduce per-node work without changing worst-case complexity.

[1] D. E. Knuth, *Dancing Links*, 2000. https://arxiv.org/abs/cs/0011047. Our candidate sets use integer bitsets, not the paper's doubly linked list implementation.


Results

Four boards were tested with dominoes, triominoes, and pentominoes. All twelve instances passed the supplied correctness checker. The single-run times in Table 1 include placement generation and search.


Table 1: Tiling results across boards and tile sets.

Board	Tile size	Placements	Search nodes	Time / ms
6×10	2	3120	31	14.74
6×10	3	3600	40	18.40
6×10	5	2056	863	17.01
5×12	2	3090	31	14.05
5×12	3	3520	27	17.75
5×12	5	1936	1073	16.71
3×20	2	2910	31	13.64
3×20	3	3040	31	15.46
3×20	5	1236	238	9.59
8×8 (central hole)	2	3000	31	14.70
8×8 (central hole)	3	3280	28	23.40
8×8 (central hole)	5	1568	2104	19.63

The number of placements alone does not predict search effort. For example, the 6×10 pentomino instance has fewer placements than its domino counterpart but requires more backtracking. The interactions between tile shapes matter more than the candidate count alone.



(a) 6×10 board



(b) Board with a central hole

Figure 1: Pentomino tilings. Equal labels identify cells belonging to one tile.

Section II Predefined Agents

Rules and search settings

The game ends when either player first completes a line on any local board. Local boards are indexed from 0 to 8 in row-major order. A move's position within its local board determines the opponent's next local board. If that board is full, the opponent may choose any empty global cell. All four games start on board 4. Offensive X moves first in games 1–2; defensive O moves first in games 3–4.

The predefined evaluation has three ordered tiers. Terminal states receive 10000 for an X win and -10000 for an O win. Otherwise, X scores 500 per unblocked two-in-a-row and 100 per blocked O two-in-a-row. O scores -100 per unblocked two-in-a-row and -500 per blocked X two-in-a-row. Only when the second tier has no counts are occupied local corners scored: 30 each for X and -30 each for O. Rows, columns, and diagonals are counted separately, so a cell may contribute to more than one line.

Both algorithms search three plies and stop early at terminal states. Leaves use the root agent's evaluation throughout a search, always expressed as X utility: X maximizes and O minimizes. Moves are visited in row-major order, and the current best move is replaced only by a strict improvement. Thus ties retain the first move. Alpha–beta search prunes when $\alpha \geq \beta$.

Minimax recurrence and pruning

A state must include the global board B, the forced local board k, and the player p: $s = (B, k, p)$. Piece locations alone do not determine legal actions. A move at global coordinates (r, c) sets $k' = 3(r \bmod 3) + (c \bmod 3)$.

Let $\mathcal{A}(s)$ be the legal actions, $T(s, a)$ the successor, and d the remaining depth. For a fixed root evaluation E,

$$V_d(s) = \begin{cases} u(s), & s \text{ is terminal}, \\ E(s), & d = 0 \text{ and } s \text{ is nonterminal}, \\ \max_{a \in \mathcal{A}(s)} V_{d-1}(T(s,a)), & p = X, \\ \min_{a \in \mathcal{A}(s)} V_{d-1}(T(s,a)), & p = O. \end{cases} \tag{3}$$

Here $u(s)$ is -10000, zero, or 10000 for an X loss, draw, or win. Minimax assumes the opponent chooses the action most adverse to this utility. The resulting conservative decision is optimal for the truncated tree, not necessarily for the full game, since nonterminal E is approximate.

Alpha and beta record existing MAX guarantees and MIN restrictions along the path. Suppose MAX already has an option worth 5. If another MIN branch finds a child worth 3, that branch's final value cannot exceed 3, so its remaining children cannot improve MAX's choice. Pruning preserves the minimax value for the same depth and evaluation.[2] For uniform branching factor b and depth d, ordinary search costs $O(b^d)$. With ideal move ordering, pruning can approach $O(b^{d/2})$; its worst case remains $O(b^d)$. The required row-major order does not justify assuming ideal ordering in these experiments.

[2] D. E. Knuth and R. W. Moore, *An Analysis of Alpha-Beta Pruning*, Artificial Intelligence 6 (1975), 293–326. https://doi.org/10.1016/0004-3702(75)90019-3.

Outcomes and pruning


Node counts include visited roots and leaves and are summed over all turns. In Table 2, MM denotes minimax and AB denotes alpha–beta.

Table 2: Results of the four required matchups.


Game	X	O	First	Plies	X nodes	O nodes	Total	Win
1	MM	MM	X	43	8768	7948	16716	X
2	MM	AB	X	43	8768	3398	12166	X
3	AB	MM	O	44	3353	8528	11881	X
4	AB	AB	O	44	3353	3431	6784	X

X won all four games. Games 1–2 have identical move sequences, with a 27.2% reduction in visited nodes after pruning. Games 3–4 also have identical sequences, with a 42.9% reduction. Alpha–beta therefore preserved minimax decisions while reducing search effort in these matchups. Games 1 and 4 cannot isolate the effect of pruning because they have different starting players.


The offensive heuristic emphasizes creating its own threats, whereas the defensive heuristic emphasizes completed blocks. The latter does not directly measure the danger of the board to which the next player is sent, which can leave it vulnerable to sequences of forced routing.

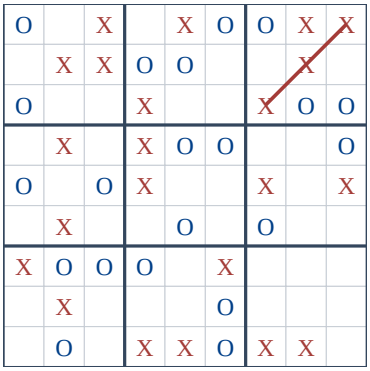


(a) Game 1: X wins; 16,716 nodes

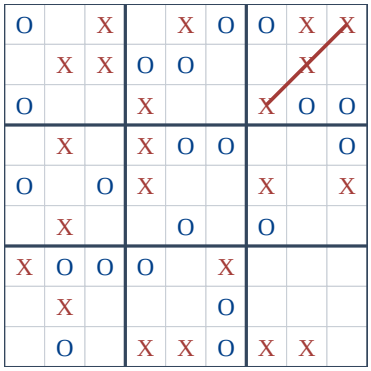

(b) Game 2: X wins; 12,166 nodes

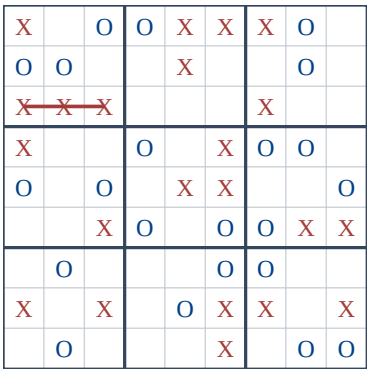

(c) Game 3: X wins; 11,881 nodes

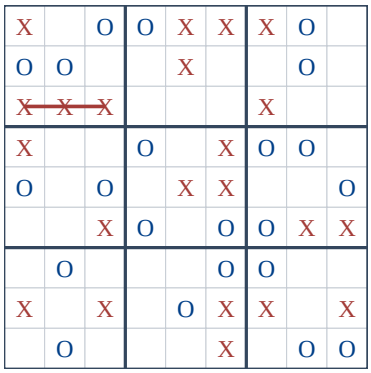

(d) Game 4: X wins; 6,784 nodes

Figure 2: Final boards of the predefined agents.

X is offensive and O is defensive. Thick lines separate local boards; colored lines mark winning triples. The four boards correspond to the rows of Table 2.

Section III Designed Evaluation

Formulation

The designed agent plays O against predefined offensive X. Both use depth-three alpha–beta search. The evaluation considers both players' threats and the board where the next player must actually move. A winning opportunity elsewhere is not necessarily playable on the next turn, so routing is evaluated explicitly.

Let T count unblocked two-in-a-row lines, W sum distinct winning empty cells over local boards, and F count local boards with at least two distinct winning cells. Let C count occupied corners and M occupied centers, with subscripts X and O identifying the player. Set $s = 1$ when X moves next and $s = -1$ when O moves next. Of the next player's L legal moves, S are safe: they do not immediately send the opponent to a board where that opponent can win. When a move routes back to the same local board, its cell is updated before testing the danger.

$$H = 400(T_X - T_O) + 35(W_X - W_O) + 800(F_X - F_O) \\ + 15(C_X - C_O) + 40(M_X - M_O) + 6000s\frac{S}{L}.$$

Actual terminal states take priority and return ± 10000. If the next player can win immediately, return $9500s$. If every legal move allows an immediate opponent win, return $-9000s$. Otherwise, use H clipped to $[-8000, 8000]$. A full global board with no winner returns zero. These static tactical checks do not extend the recursive search beyond three plies.

The ratio S/L avoids favoring a board merely because it has fewer empty cells. The feature F distinguishes two independent winning cells from two lines sharing one blocking cell. Immediate threats take priority over general positional scores; centers and corners have smaller weights.

Feature interpretation and the search horizon

T measures potential attacking lines; W and F distinguish threats that can be removed by a single block from independent winning cells. Two lines sharing one winning square can still be blocked together. Even independent threats depend on the forced board, so global line counts alone are insufficient.

The safety term has the current player's sign. A larger S/L increases X utility when X moves next and decreases it when O moves next. It converts the consequence of sending the opponent to a particular board into a comparable state feature. Separating actual outcomes, immediate tactical values, and ordinary heuristic values prevents distant line or corner scores from outweighing immediate wins and losses. These scores rank positions; they are not winning probabilities.

Finite depth creates a horizon effect: longer forced returns can fall beyond the search boundary. The evaluation recognizes immediate wins and positions where every choice loses immediately, but it cannot prove the safety of longer sequences. Match results are therefore necessary, and success against the fixed opponent does not establish strength against arbitrary human strategies.

Parameter comparison

Development covered all nine starting boards and both starting players, giving eighteen conditions. The initial safe-count scheme won eleven; the best adjusted safe-count scheme won fourteen. Position weights, threat spread, and safety ratios were then compared. The ratio weight 6000 was selected for the most development wins in Table 3.

Table 3: Development comparison of mobility features.

Mobility feature	Weight	Development wins / 18
Safe-move count	35	11
Safe-move count	1000	14
Safe-move ratio	1000	16
Safe-move ratio	3000	16
Safe-move ratio	6000	18

There are only eighteen opening conditions, so development and subsequent random games are not strictly independent. The results establish an improvement against this specified opponent, rather than a guarantee against arbitrary strategies.

Randomized match results


With random seed 448, each game's starting board and player were sampled randomly. Across 40 games, O won 40, X won 0, and 0 were drawn. The designed agent's win rate was 100.0%, exceeding the required 80%. The average total search count was 6,516.7 nodes per game.

Table 4: Per-game results; node counts sum both players' searches.


Game	Start	First	Plies	Nodes	Win	Game	Start	First	Plies	Nodes	Win
1	4	O	33	5,759	O	21	3	X	38	6,716	O
2	1	X	36	7,901	O	22	8	O	27	5,217	O
3	4	O	33	5,759	O	23	3	O	29	5,976	O
4	0	X	32	6,700	O	24	8	O	27	5,217	O
5	8	O	27	5,217	O	25	4	X	34	6,104	O
6	6	X	36	7,107	O	26	6	X	36	7,107	O
7	1	X	36	7,901	O	27	6	O	37	7,187	O
8	3	X	38	6,716	O	28	7	X	36	6,206	O
9	8	O	27	5,217	O	29	6	O	37	7,187	O
10	5	X	36	6,536	O	30	1	O	33	6,850	O
11	5	O	41	6,969	O	31	6	O	37	7,187	O
12	7	X	36	6,206	O	32	5	X	36	6,536	O
13	4	X	34	6,104	O	33	3	O	29	5,976	O
14	8	O	27	5,217	O	34	0	X	32	6,700	O
15	5	O	41	6,969	O	35	6	X	36	7,107	O
16	5	X	36	6,536	O	36	3	X	38	6,716	O
17	1	X	36	7,901	O	37	0	O	35	7,409	O
18	0	X	32	6,700	O	38	8	O	27	5,217	O
19	0	O	35	7,409	O	39	3	O	29	5,976	O
20	5	X	36	6,536	O	40	3	X	38	6,716	O

Policies and tie-breaking are deterministic. Repeated starting conditions therefore produce repeated games; the forty runs are not forty distinct tests of opponent strategy.


Representative positions

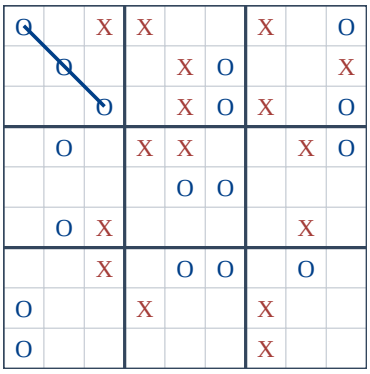


(a) Game 1: start 4, O first

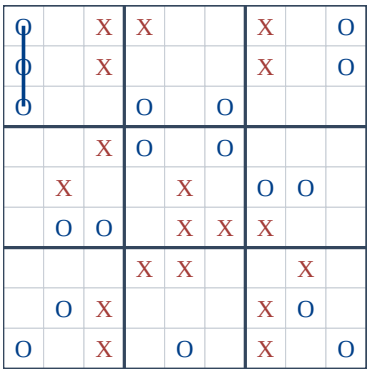

(b) Game 2: start 1, X first

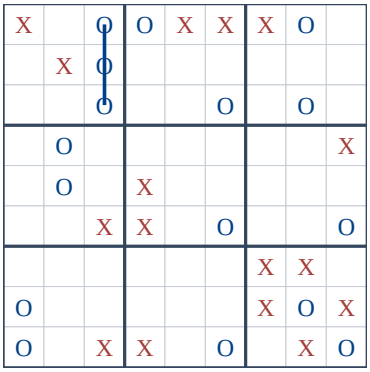

(c) Game 4: start 0, X first

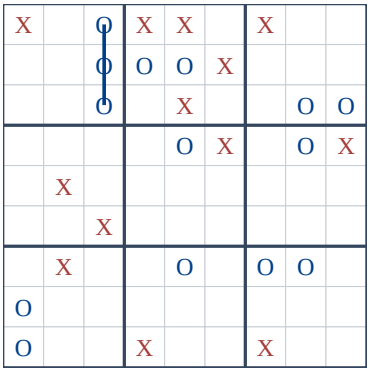

(d) Game 5: start 8, O first

Figure 3: Representative final boards of the designed agent.

Immediately before the final move, X had 5, 7, 3, 4 legal choices in the four games, respectively, but none could prevent O from winning on the next turn. The preceding threats and routing had already forced the outcome; these wins did not merely depend on X overlooking a final block. The predefined offensive agent emphasizes its own two-in-a-row score, whereas the designed evaluation also considers the destination of the next turn and gives routing threats greater priority. Final boards alone cannot isolate the causal effect of an individual weight. These findings remain specific to the tested opponent and opening conditions.

Section IV Human Games

Protocol and game records

The human plays X and the designed agent plays O, with randomized starting board and player. At least ten games are required, followed by a discussion of win rates, representative final boards, and the agent's strengths and weaknesses.

This section is a data-entry layout. The tables and reserved boards contain no measured games; dashes do not mean draws or zero win rates.

Table 5: Human-game records. Unplayed slots remain explicitly pending.

Game	Start	First	Plies	Winner	Agent nodes	Status
1	—	—	—	—	—	Pending
2	—	—	—	—	—	Pending
3	—	—	—	—	—	Pending
4	—	—	—	—	—	Pending
5	—	—	—	—	—	Pending
6	—	—	—	—	—	Pending
7	—	—	—	—	—	Pending
8	—	—	—	—	—	Pending
9	—	—	—	—	—	Pending
10	—	—	—	—	—	Pending

Win-rate summary

Table 6: Summary statistics for the human experiment.

Measure	Result
Completed games	0 / 10
Human wins / agent wins / draws	—
Human win rate	—
Agent win rate	—

For each completed game, record the starting board, first player, number of plies, winner, agent node count, and final board. Human win rate is human wins divided by completed games; a draw is not a win. Unstarted or interrupted games do not enter the denominator.

Representative boards and observations



(a) Reserved position 1 (pending)



(b) Reserved position 2 (pending)



(c) Reserved position 3 (pending)



(d) Reserved position 4 (pending)

Figure 4: Slots for representative human final boards. Pending frames are not experimental results.

Outcome distribution and whether humans always won

Pending actual game observations.

Critical moves, strengths, and mistakes

Pending actual game observations.

Evaluation weaknesses and improvements

Pending actual game observations.

Depth-three search can miss longer forced-routing sequences. The safety ratio checks immediate danger, not safety across several future turns. Human games should examine whether threats prepared on several boards can force the agent into an unavoidable loss, and whether fixed corner and center weights interfere with necessary defense. These are questions for the planned experiment, not empirical conclusions from human play.

Supplementary synthetic opponents (not human play)

These thirty automated games are excluded from the human results and do not fulfill the requirement for at least ten human games. The policies were not calibrated against human behavior; their rates are not human win rates. Synthetic X faces depth-three designed O under the same first-local-win rules. Random X samples legal moves uniformly. Tactical X first takes an immediate win, then blocks an immediate opposing win in the legal area, then prefers centers and corners; with probability 15% it instead moves randomly. Shallow X uses depth-two alpha–beta with the predefined offensive evaluation, moving randomly with probability 10%. Tactical ties are random; search retains the first tie.

Seed 20261106 generates ten starting boards and first-player choices, shared across policies. Game i of policy p uses seed $20261106 + 1000p + i - 1$, both indices starting at one. Policies and error probabilities were fixed before execution. All outcomes were retained without screening losses or selecting new openings.

Table 7: Synthetic opponents versus designed O; not human statistics.


Synthetic X	Games	X wins	O wins	Draws	O win rate	Mean plies
Random	10	0	10	0	100%	15.9
Tactical	10	0	10	0	100%	9.1
Shallow	10	0	10	0	100%	29.5

Table 8: All thirty synthetic games. Starting boards are numbered 0–8.

Game	Policy	Start	First	Plies	Win
1	Random	0	O	11	O
2	Random	2	O	25	O
3	Random	0	X	28	O
4	Random	5	O	13	O
5	Random	4	X	14	O
6	Random	0	X	8	O
7	Random	0	X	10	O
8	Random	1	O	21	O
9	Random	4	X	14	O
10	Random	2	O	15	O
11	Tactical	0	O	9	O
12	Tactical	2	O	7	O
13	Tactical	0	X	10	O
14	Tactical	5	O	11	O
15	Tactical	4	X	10	O

Game	Policy	Start	First	Plies	Win
16	Tactical	0	X	8	O
17	Tactical	0	X	10	O
18	Tactical	1	O	11	O
19	Tactical	4	X	6	O
20	Tactical	2	O	9	O
21	Shallow	0	O	13	O
22	Shallow	2	O	33	O
23	Shallow	0	X	36	O
24	Shallow	5	O	37	O
25	Shallow	4	X	38	O
26	Shallow	0	X	10	O
27	Shallow	0	X	36	O
28	Shallow	1	O	17	O
29	Shallow	4	X	36	O
30	Shallow	2	O	39	O

Representative synthetic games and interpretation

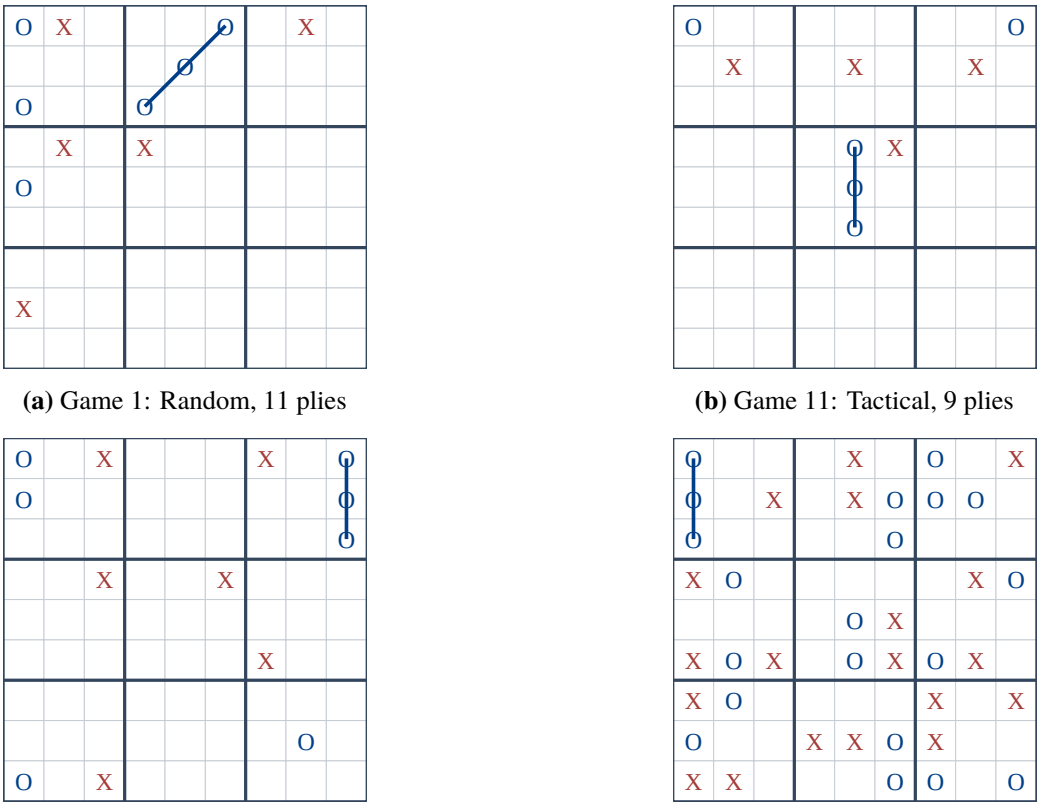

(a) Game 1: Random, 11 plies

(b) Game 11: Tactical, 9 plies

(c) Game 21: Shallow, 13 plies

(d) Game 30: Shallow, 39 plies

Figure 5: Representative synthetic-opponent boards (not human play).

The boards show the first game of each policy and the longest game overall. Each synthetic policy lost all ten games: designed O won 30/30, or 100%. Mean lengths were 15.9, 9.1, and 29.5 plies, respectively. Shallow search delayed termination on these openings. Tactical X checks immediate threats in the legal area, while its positional preferences ignore routing risk. Even an immediate block can therefore send the opponent to another board with an existing threat. Local defense alone does not resolve cross-board routing; game length itself is not a ranking of playing strength.

Every trace was replayed to check legal moves, board changes, and outcomes, then reproduced with the same seed to verify the full trajectory. There are only ten games per policy, with shared openings: these thirty games are not independent human samples. Zero losses establish an advantage on this fixed test, not a guarantee against arbitrary opponents. Human testing remains necessary, particularly for longer forced routes, deliberate traps, and exploitation of the heuristic's preferences.

Extra Credit

Global-line rules

A local three-in-a-row captures and closes that board; no further move is allowed inside it. A full local board without a winner is marked D and also closed. A move routes the opponent as before, but a closed destination permits free choice among all open local boards. Victory requires three captured boards in a global row, column, or diagonal. The game is drawn when all local boards are closed without a global winner.

The state must track local ownership as well as pieces. Let $z_i \in \{X, O, D, _\}$ denote an X capture, O capture, closed draw, or open board. The capture total alone is insufficient: two disconnected captures need not be as valuable as two that create an open global threat.

Custom offensive and defensive evaluations

Both offensive X and defensive O use depth-three alpha–beta search. Let G count captured boards, P, Q count open global two-mark and one-mark lines, and T, L count open two-mark and one-mark lines within open local boards. K weights captured boards by 3 at the center, 2 at corners, and 1 at edges. A counts two-mark lines on local boards available to the next player. J equals that player's sign s if an immediate local capture is possible, and zero otherwise. In X utility,

$$\begin{aligned} H_g = {} & aG_X - 450G_O + bP_X - 1400P_O + 150Q_X - 120Q_O \\ & + dT_X - 35T_O + 4(L_X - L_O) + 25(K_X - K_O) \\ & + 80(A_X - A_O) + 200J. \end{aligned}$$

The offensive root uses $(a, b, d) = (500, 1600, 45)$; the defensive root uses $(550, 1800, 55)$. By weighting X captures and threats more heavily, the defensive agent prioritizes limiting X while minimizing the score. Actual global outcomes return ± 10000. An immediate global win for the next player returns $9500s$; otherwise H_g is clipped to $[-8000, 8000]$, with zero for a global draw. Closed boards contribute no local potential, and D blocks global attacking lines.

Experimental results

With random seed 2013, 12 games gave 5 X wins (41.7%), 5 O wins (41.7%), and 2 draws (16.7%). The mean game lasted 54.2 plies and visited 10,973.4 nodes.


Table 9: Global-line results. Capture counts refer to won local boards at termination.

Game	Start	First	Plies	X boards	O boards	Nodes	Win
1	6	X	57	5	3	10,425	X
2	0	X	55	4	5	12,530	Draw
3	6	X	57	5	3	10,425	X
4	5	X	54	5	4	9,343	O
5	6	X	57	5	3	10,425	X
6	8	O	48	5	3	12,700	X
7	6	X	57	5	3	10,425	X
8	8	X	52	2	5	16,189	O
9	4	X	56	3	6	10,004	O
10	0	O	49	3	6	8,712	O
11	6	O	47	3	4	10,666	O
12	1	X	61	5	3	9,837	Draw


All games were replayed step by step: every move followed the forced-board rule, closed boards remained unchanged, and the recorded outcome matched the global-line test. Search used row-major order and retained the first move on ties. Both agents won and lost in the twelve games, with draws also occurring. Local success therefore did not always convert into a global win. Repeated opening conditions produced repeated traces, so these rates describe this deterministic pair of policies.

The global heuristic must balance local captures against their arrangement. Larger global-threat weights prioritize boards needed to complete a global line, but fixed depth can still miss longer routing sequences. This experiment demonstrates the implemented rules and runnable strategies; it does not establish that either weighting is superior against broader opponents.


Representative extended-game boards

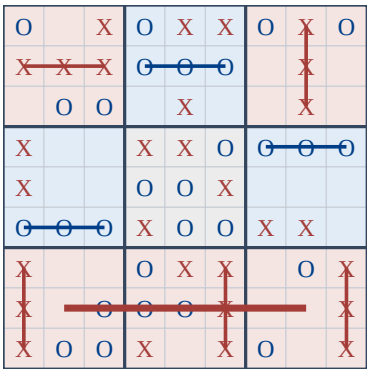


(a) Game 1: X wins; boards 5:3

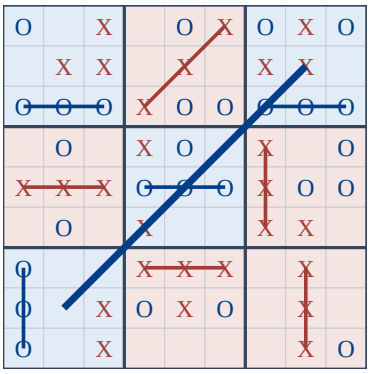

(b) Game 4: O wins; boards 5:4

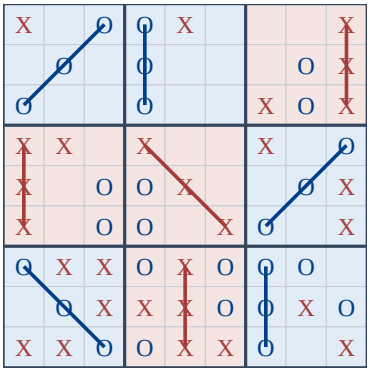

(c) Game 2: draw; boards 4:5

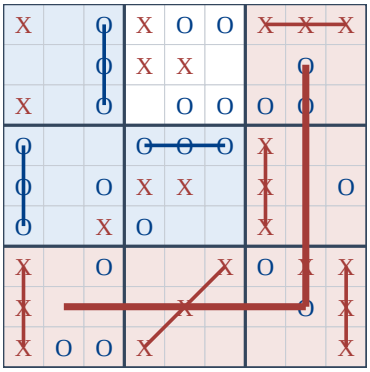

(d) Game 6: X wins; boards 5:3

Figure 6: Representative final boards under the global-line rule.

Pale red and blue indicate captured, closed X and O boards; gray marks drawn local boards and white marks open boards. A thick line across three local-board centers marks a global win.

In game 1, X won through local boards 6,7,8. The capture count was 5:3; the arrangement of captured boards, not their total alone, determines victory.

In game 4, O won through local boards 2,4,6. The capture count was 5:4; the arrangement of captured boards, not their total alone, determines victory.

Game 2 ended in a draw: every local board was closed, but neither side formed a global line. 0 local boards were drawn.

In game 6, X won through local boards 6,7,8. The capture count was 5:3; the arrangement of captured boards, not their total alone, determines victory.

Statement of Contribution

The following is a proposed allocation for distributing the remaining work, not a record of completed individual contributions. The group should review the results together and update this statement after completing the assigned tasks.

Table 10: Proposed allocation, pending group confirmation.

Member	Proposed responsibility
Wang Libin	CSP formulation, tiling solver review, correctness checks, and Section I.
Jiang Jiahao	Search verification under both rules, predefined matchups, node statistics, and Section II.
Wang Zizheng	Designed evaluation, parameter comparison, randomized and global-rule experiments, Section III, and Extra Credit.
Xue Xiaokang	Organizing at least ten human games, recording representative boards, Section IV, and coordinating proofreading.

The current code, automated experiments, and report draft were prepared with Codex assistance.